

OWL AND FLOWER BELT

S = 92-104 cm
M = 110-122 cm
L = 128-140 cm





W
E
R
B
E
R
T
O
T
T
E

MATERIALS


- 5 cm solid-colored (design A) or printed cotton poplin (design B)
- 6 cm corduroy
- 11 cm interfacing, Vlieseline G 700
- pinless belt buckle or 2 D-rings, belt width 30 mm

For print, design A:

- fabric paint, Gütermann
- scalpel or small sharp scissors
- plastic sheeting (e.g. plastic pocket) for template
- spray adhesive, Gold-Zack
- painter's tape
- disposable plate and spoon
- piece of sponge



1 2

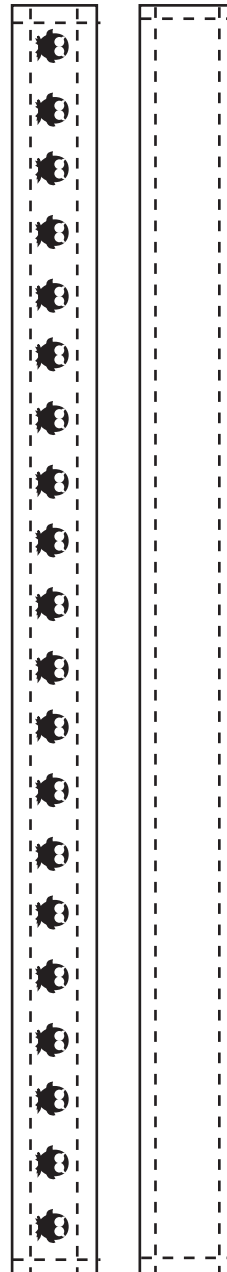

PATTERN PIECES	cut	width	length		
			S	M	L
1 outer belt panel*	1	4.5 cm	80 cm	85 cm	90 cm
2 inner belt panel*	1	5.5 cm	80 cm	85 cm	90 cm

CUTTING

Cut outer belt panel from cotton poplin and inner belt panel from corduroy as indicated on list of pattern pieces. *Pattern pieces include all seam allowances! Cut interfacings for both belt panels without seam allowances.

SEWING

Seams and hems: Stitch seams with straight stitch and topstitch them close to edge.

PRINT, design A

Select a series of three owls on pattern sheet. Start printing at one end of belt and make sure to place template in the next area to be printed so that owls are evenly spaced.

1. Trace motif from pattern sheet on plastic sheeting and cut shaded parts of motif out.
2. Spray adhesive on wrong side of template and bond template to outer belt panel. Secure edges of template in place with painter's tape and cover rest of belt panel to protect it from paint splashes.
3. Pour a small amount of paint on disposable plate and dab sponge in it so that paint gets evenly distributed on sponge.
4. Dab a small amount of paint at a time in openings on template with sponge.
5. Allow print to dry properly and fix it to fabric by pressing, following directions on paint container.

Experiment printing on a scrap of fabric before starting!

Preparation: Fuse interfacings to both belt panels. Turn and press 1 cm seam allowance on one long edge of each belt panel to wrong side.

Joining: Pin straight long edges of belt panels together, right sides facing, and stitch them together; stop stitching 4 cm before end of belt. Pin belt panels together, wrong sides facing, so that a couple of millimeters of inner belt panel show on both edges of belt on right side. Turn and pin seam allowances at one end of belt in; the other end is left open. Topstitch belt panels together all around close to edge of outer belt panel (the one with print).

Finish raw end of belt and thread it through D-rings or belt buckle. Fold end of belt back against inner belt panel and stitch it in place as close to buckle as possible.

